



DC-DC Power Solutions for Railway



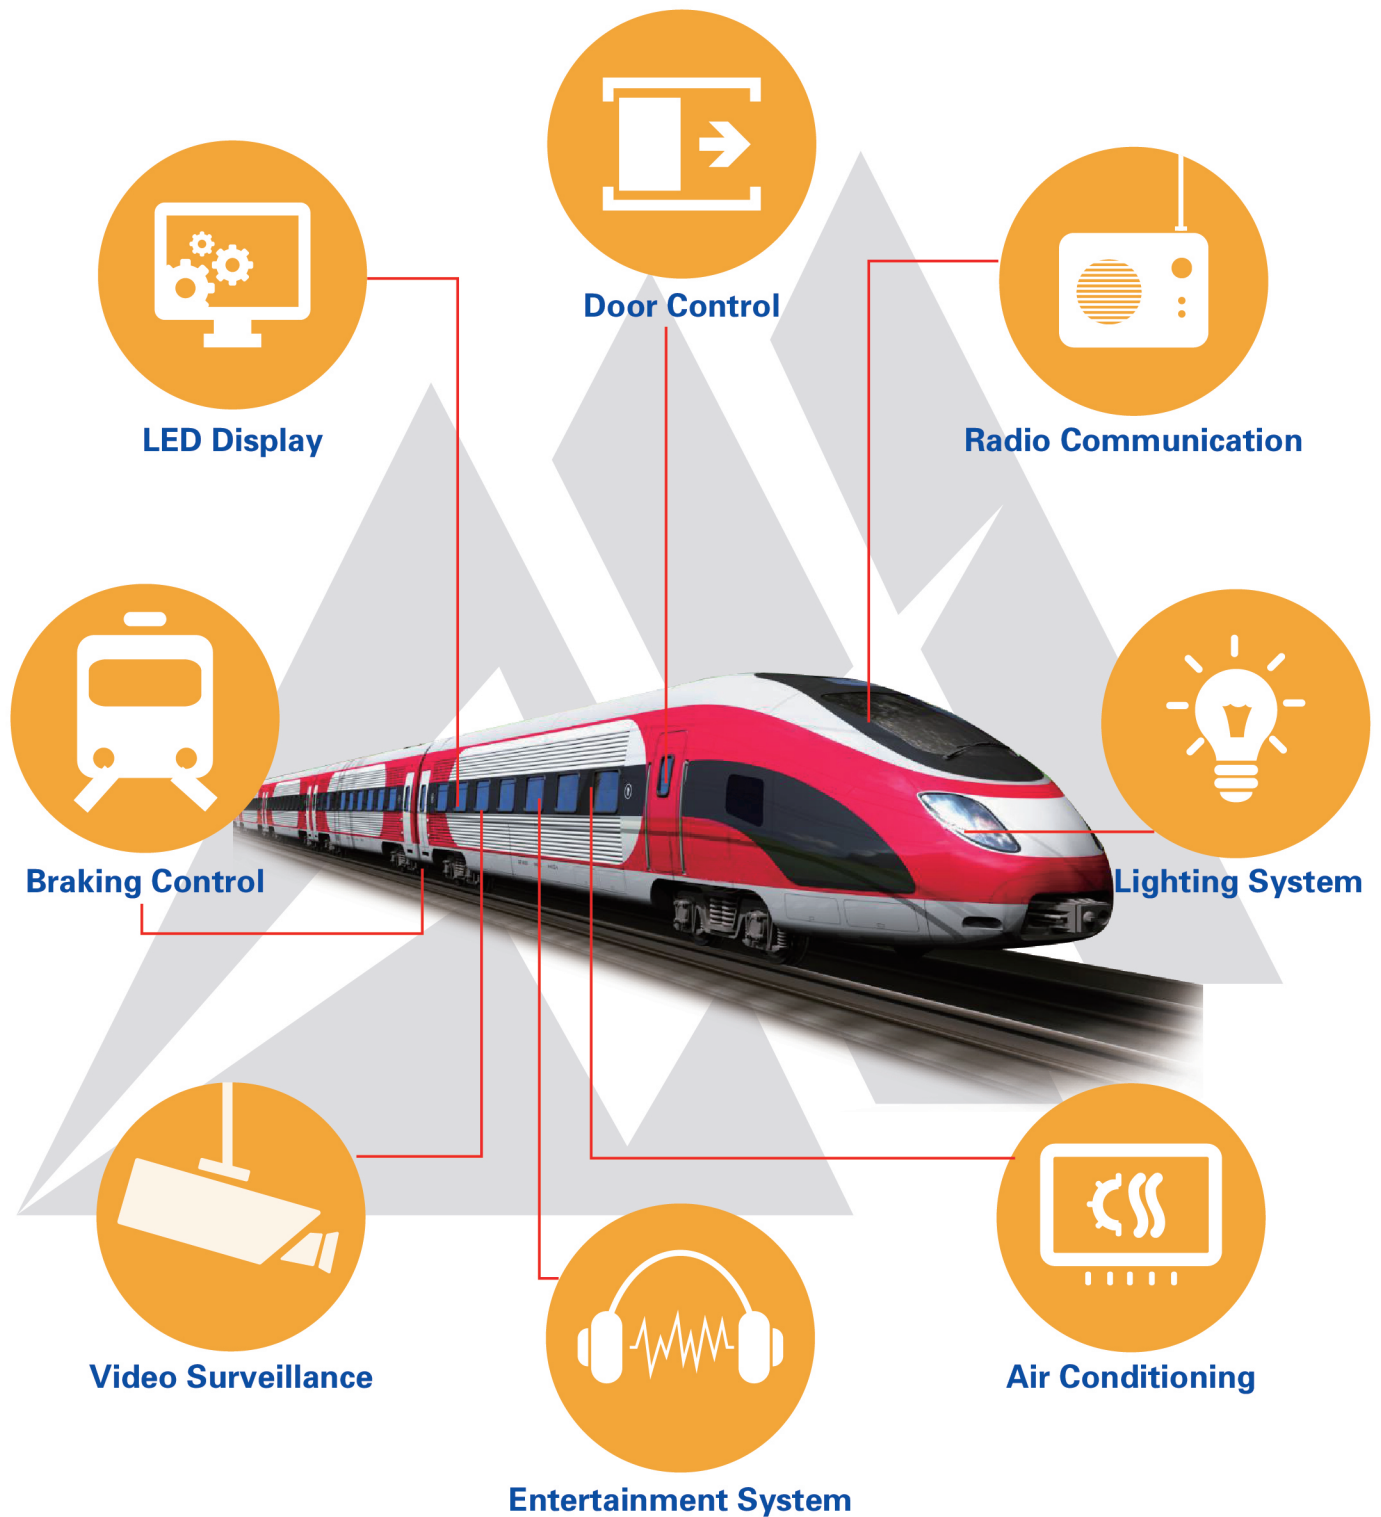

**Quarter
Brick**

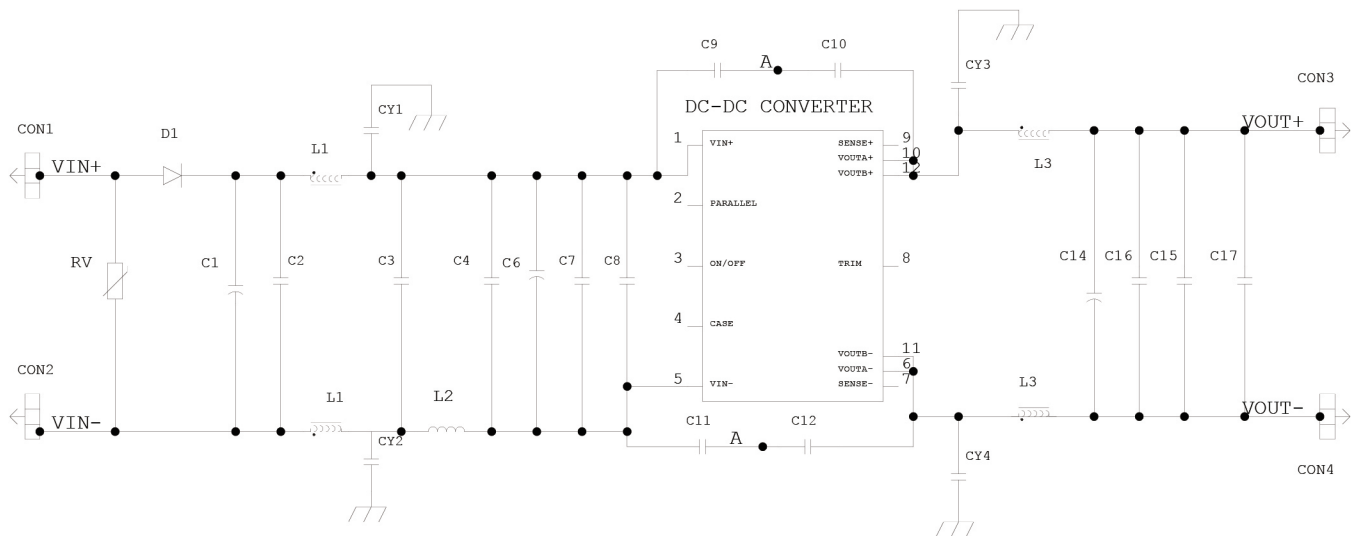

**Half
Brick**



**Full
Brick**



◆ 16–160V, 34–160V, 66–160V DC input ranges

◆ Encapsulated for harsh environments

◆ 3000VAC input to output isolation

◆ Excellent thermal performance

◆ Industry standard footprint

◆ Designed to meet EN50155